

SKY LUM ROUND




**LUMENIA
INTERIOR**

An eye-catching addition to every interior, SKY ROUND offers high visual comfort and quality in every detail. Flat and lovely curved design of this beautiful luminaire adds that something special to any room. It's a perfect choice for offices, conference rooms, shops, restaurants, and artistic constructions.



	SKY LUM ROUND
System efficacy	Up to 100 lm/W
Supply voltage	230 V / 50 Hz
Power	40 W
Luminous flux	4000 lm
Power factor	> 0.96
Weight	4.5 kg
Lifetime L70B10	50,000 h
CCT	Tunable from 2,900 K to 5,400 K
CRI	>85@2,700 K; >85@4,000 K; >85@5,400 K
UGR	<19
SDCM	<4
Ingress protection	IP 40
Surge protection options	1kV/2kV
Operating temperature	-20 °C to + 45 °C
Electrical / Appliance class	Class I + III
Light distribution	Direct / Indirect
Dimming levels	0-100 %
Remote control options	DALI, DALI DT8
Colour	White
Housing material	Anodized aluminium frame; PMMA LGP difusor
Mounting	Pendant
Warranty	5 years
Certificates	CE

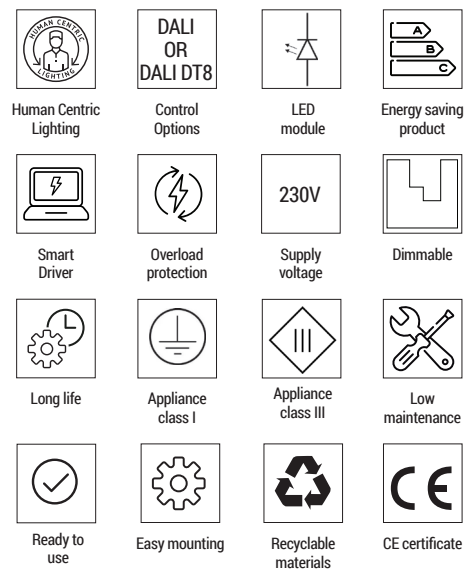

MAIN FEATURES

Improvement of circadian rhythm
High energy emitted inside C (λ)
Direct and indirect light distribution


APPLICATIONS

Hospitals
Nursing homes
Educational establishments
Offices
Beauty and hair salon


ACCESSORIES

Bluetooth module

DIMENSIONS

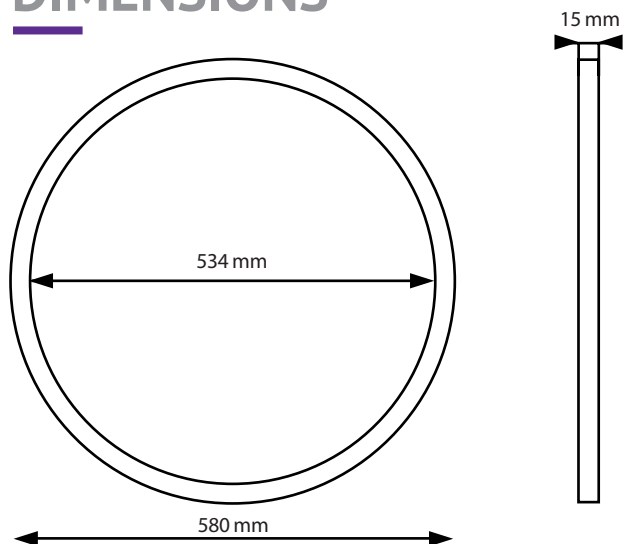

OPTIC

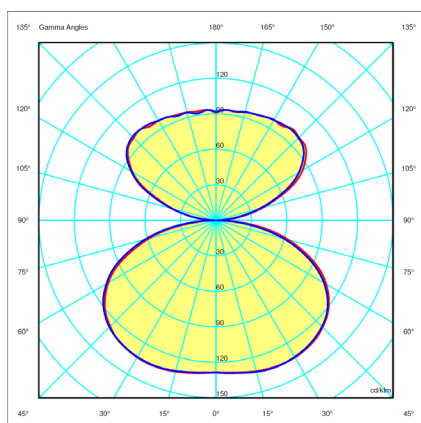

SKY LUM ROUND: Direct and indirect illumination for installations up to 3 m.

LEGEND

	Abbreviation	Description
Luminaire	SKR	SKY LUM ROUND
Power	40	40 W
CCT, CRI	HCL	5500K CRI>85 and 3000K CRI>85
Size	580	Diameter: 580mm
Power supply	00	DALI DT8
Color	9016	White

PRODUCT VARIATIONS

Article	Power [W]	Luminous flux [lm]*	Efficacy [lm/W]
SKR.40.HCLR.580.LGP.00.9016	40	4000	100

The latest validated data is available at www.lumenia.com.